

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16H 3/72, 1/46, 37/08, F03D 11/02, H02P 9/04	A1	(11) International Publication Number: WO 96/30669 (43) International Publication Date: 3 October 1996 (03.10.96)
(21) International Application Number: PCT/KR96/00042 (22) International Filing Date: 27 March 1996 (27.03.96) (30) Priority Data: 1995/6522 27 March 1995 (27.03.95) KR (71)(72) Applicant and Inventor: SHIN, Chan [KR/KR]; 2732-9, Bangbae 2-dong, Seocho-ku, Seoul 137-062 (KR). (74) Agent: PARK, Moon, Su; Cambridge Building, 4th floor, #408, 825-18, Yoksam-dong, Kangnam-ku, Seoul 135-080 (KR).		(81) Designated States: AU, BR, CA, CN, JP, NZ, RU, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: A VARIABLE R.P.M. CONVERTING PLANETARY GEAR SYSTEM**(57) Abstract**

The present invention is to provide an advance variable-speed operation wind turbine system which overcomes the disadvantages and deficiencies of the conventional variable-speed and fixed-speed operation technology. The disclosed variable r.p.m. converting planetary gear system is designed to be used with a variable-speed operation wind turbines for the wind energy converting system which is comprised of the three mechanical configurations: an actuator control mechatronics controlled by microprocessor part (300), an actuator part (200), including three reversal transfer gears (600), and the variable r.p.m. converting part (400) of the special featured planetary gear system. The variable-speed r.p.m. input rotation force created by the varying rotor speed in accordance with wind velocity, is converted to a pre-set constant r.p.m. output force by adjusting the rotation speed and direction of the ring gear (440) of the converting system. The operational control is built up on the base of the microprocessor system with a monitoring sensor supervised the r.p.m. of input or output shaft in order to pre-set constant r.p.m. output. The system, thereby, allows to generate a high-quality mains power from variable-speed wind turbine without any power-electronic inverter system.

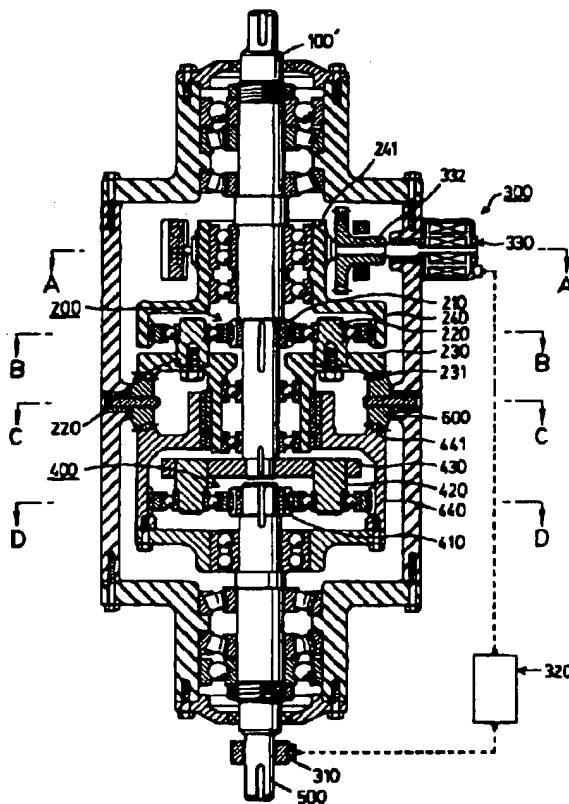

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

DESCRIPTION

A VARIABLE R.P.M. CONVERTING PLANETARY GEAR SYSTEM

Technical Field

The present invention is related to the variable-speed operation of the wind turbine technology. With variable-speed r.p.m. input force which
5 converts into an increasing pre-set constant-speed r.p.m. output a highly efficient mechatronic logic actuator controlled variable r.p.m. converting planetary gear system in order to generate a constant-output frequency and voltage of utility grade power output, despite the variable-speed r.p.m. input of the rotor turbine under varying wind conditions.

10 Background Art

Wind is one of the coldest form of energy used by man. With enormous increases in demand for environmentally friendly sources of energy, plus a growing fossil-fuel shortage, development of alternative energy sources has been stimulated.

15 In this same environment, wind conversion technologies are becoming more efficient and competitive, generating a high quality of electrical energy.

However, in order to meet global clean energy needs, it will be necessary to adopt a new technical approach to wind-generated electrical energy production.

There are two major challenges to a developer of a wind energy
20 converting system : a constant-speed technology system and a variable-speed processing technology system.

The pitch control system of constant-speed wind turbines are designed to operate over a very narrow wind speed range in order to maintain constant-speed rotation for a fixed frequency of electricity produced.

However, the system should be provided with a power-electronic inverter as
5 essential equipment for fixed frequency and constant power output, but the conventional power-electronic inverter systems deliver poor power quality with high levels of harmonics and a varying power factor.

The variable-speed technology of wind turbines can improve energy capture and reduce mechanical stress and audible noise levels caused by the
10 varying speed of the rotor according to wind velocity. It is possible to maintain the ideal angle of attack of the blades over a wide range of wind conditions.

The present invention provides for a more cost effective and high quality of electricity producing improved mechatronic control system which is based on
15 the prior art system patented in Korea under No. 057585 and in the United states under No. 5222924.

It should also be noted that an important feature of the invention which converts a variable-speed r.p.m input force into a constant-speed r.p.m output with an high efficiency without change to the gear ratio of the planetary gear
20 system controlled by mechatronic logic control system.

Disclosure of Invention

The majority of wind turbines currently installed operate at constant speed through grid-connected alternators or induction generators, so that at the maximum performance coefficient $C_p(\max)$ will only occur at one wind
25 velocity. $C_p(\max)$: yielding a maximum power coefficient.

Therefore, to maximize the annual energy capture the rotor turbine should be provided with a innovational system for a continuos range of variable-speed

operation in all wind conditions.

Although a number of mechanical variable-systems have been tried, the majority of designs use power-electronic inverter interface. The conventional power-electronic interfaces providing the necessary frequency conversion return
5 power to the network through Line Commutable Inverter(LCI). These deliver poor quality power with high harmonics and a vary power factor even if supply side harmonic filters are used. The present invention of the system can eliminate all of the above mentioned problems.

Referring now to the drawing, in FIG. 1 shown is a general perspective
10 structure of the advanced wind turbine equipped with the said system and in FIG. 2 is an overall control schematic diagram of the system.

When variable-speed rotation r.p.m. increased by the main gear system
100 from the input force of rotor turbine, it is applied to the variable speed actuator 200 and the convertible r.p.m. of planetary gear device 400 via an
15 input axle shaft 100' from the main gear 100. The actuator 200 controls the variable r.p.m. converting system 400 according to the control signal which is processed by the mechatronic governing part 300 including forward-reverse variable speed motor 330 equipped with a sensor 310 for monitoring the pre-set r.p.m. of the output axle shaft 500.

20 In FIG. 3 is shown a software operational flow chart which illustrated the sequence of controls. If the final output r.p.m. (Z_o) meets the pre-set r.p.m. (R_o) then the microprocessor 320 controls the ring gear 440 immovable neutral position for the constant output r.p.m. $R_o = Z_o$, if the output r.p.m. (Z_o) is higher than the pre-set r.p.m. (R_o) $R_o \leq Z_o$, the microprocessor 320 controls
25 to clockwise rotation direction and the speed of ring gear 440, if the r.p.m. Z_o is lower than the r.p.m. R_o $R_o \geq Z_o$ the microprocessor 320 controls to counter-clockwise rotation direction and the speed of ring gear(440) by means of a mechanical processing of rotation speed and direction of the ring gear 440 of the system 400.

Brief Description of the Drawings

The present invention will be fully appreciated as it becomes better understood through detailed description of the accompanying drawings ;

FIG. 1 is a side elevational view of the multi-input propeller-type wind turbine generator containing a variable r.p.m converting planetary gear system
5 according to the present invention.

FIG. 2 is a block diagram of the control system for the constant-speed rotating output system of the present invention.

FIG. 3 is an operational flow chart of microprocessor of the present invention.

10 FIG. 4 is a detailed cross sectional view of the main embodiment of the present invention.

FIG. 5 is a cross-sectional view of FIG. 4, taken along line A-A.

FIG. 6 is a cross-sectional view of FIG. 4, taken along line B-B and line D-D.

15 FIG. 7 is a cross-sectional view of FIG. 4, taken along line C-C.

Best Mode for Carrying Out the Invention

In reference to details regarding the illustrations of the preferred designs of the present invention, as shown in FIG. 1, FIG. 2, FIG. 3 and FIG. 4, it is comprised of :

- 20 — a multi-input rotor turbine equipped with a main gear system 100, as shown in FIG. 1 and FIG. 2, which has a vertical output axle shaft 100',
- an actuator 200 controlled by mechatronic control device 300,
- a ring gear 240, forward-reverse variable speed rotatable, being controlled by actuator motor 330 of the control part 300,
- 25 — a spider 230, forward-reverse variable speed rotatable, connected to the three planet gear members 220 which provided a respective pivotal axis,
- a spider 430, connected to the input shaft 100', consisting of three planet

gear members 420 which provided a respective pivotal axis,

- the reversal transfer gears 600 being pivotally fastened to the case 10 in order to convert the rotation direction of spider 230 and ring gear 440 or reverse,
- 5 — a ring gear 440, forward-reverse variable speed rotatable, being controlled by spider 230 of the actuator 200,
- a microprocessor 320 equipped with the r.p.m. sensor 310 for monitoring the final r.p.m. of the output axle shaft 500,
- a forward-reverse variable-speed actuating motor 330 governing the rotation
- 10 speed and direction of the ring gear 240 of the actuator 200 controls the rotation speed and direction of the ring gear 440.

As shown in FIG. 4, in detailed drawings, for the purpose of illustrating the preferred embodiment of the variable r.p.m. converting system in order to convert to constant-speed r.p.m. output of the present invention for use in a

15 variable-speed rotor turbine as well as other applicable mechanical devices where need be. The possible system control methods are achieved as follows:

1). The Output r.p.m. equals pre-set r.p.m. with $R_0 = Z_0$

$$Z_0 = \left(\frac{1+ZR}{Z_s} \cdot \Delta n_1 \right) + \left(\frac{ZR}{Z_s} \cdot 0 \cdot \Delta n_2 \right) \dots\dots\dots \textcircled{1}$$

R_0 : the number of output r.p.m. of pre-set constant-speed

20 Z_0 : the number of output r.p.m. of constant-speed.

Δn_1 : the number of input r.p.m. of variable-speed.

Z_s : the number of teeth of sun gear 410.

ZR : the number of teeth of ring gear 440.

Δn_2 : the number of rotation speed and direction of ring gear 440.

25 0 : Zero(neutral position).

As shown in FIG. 2 and FIG. 4, variable r.p.m. Δn speed input from

the main gear system 100 is applied to the input sun gear 210 through the input axle shaft 100' in the center of the actuator 200.

Accordingly if the sun gear 210 of the actuator 200 rotates clockwise, the three planet gear members 220, connected to spider 230 are revolve around the
5 sun gear 210 in a geared relationship with the forward-reverse rotatable ring gear 240.

When the input rotating force is applied to the spider 430, consisting of three planet gear members 420, connected to the lower end of the input axle shaft 100', which rotates in a geared relationship with the sun gear 410 and
10 the ring gear 440 in the same direction. This effect is caused by the planet gear members 220 which are forced to revolve around the sun gear 210 counter-clockwise by load reaction rotation force from the constant r.p.m. converting system 400. Because of the rotation load reaction force from the forward-reverse rotatable ring gear 440 is applied to the spider 230 of the
15 planet gear members 220 of the actuator 200 through the gear teeth 441 and reversal transfer gears 600 and gear teeth 231 of the spider 230.

As shown in FIG. 4 and FIG. 5 the final output speed r.p.m monitoring sensor 310, positioned around the output axle shaft 500, sends a $R_0=Z_0$ signal to the microprocessor 320, which processes the signal $R_0=Z_0$ to the control
20 mechatronic variable-speed forward-reverse actuating motor 330 of the actuator 300, which being connected to the control gear(332) connected to the rotor shaft 331, which rotates in a geared relationship with the activating gear 333. This activating gear 333 is equipped with a horizontal rotor shaft 334, connected to the worm gear 340 which rotates in a geared relationship with
25 worm-wheel-gear 350 connected to the extender 241 which extended from the ring gear 240 of the actuator 200.

However, if the spider 230 of the planet gear members 220 of the actuator 200 is forced to revolve around the counter-rotation of input sun gear 210 by the load reaction force, as previously described, is to be controlled in

balance to immovable neutral position by the speed of the ring gear 240 of the actuator 200 through the actuating motor 330 of actuator control system 300.

As a result the variable r.p.m. converting planetary gear system 400, operates as a normal operation planetary gear in principle, thus the input r.p.m. force is applied to the spider 430 of the planetary gear numbers 420 through the input axle shaft 100' with an immovable neutrally positioned ring gear 440. The output sun gear 410 rotates at the speed of pre-set constant-speed r.p.m. of the converting system 400, which is consistent with the equation ①.

2) The Output r.p.m. is higher than the pre-set r.p.m. with $R_0 \leq Z_0$.

$$Z_0 = \left(\frac{1+ZR}{Z_s} \cdot \Delta n_1 \right) + \left(\frac{ZR}{Z_s} \cdot -\Delta n_2 \right) \dots\dots\dots ②$$

$-\Delta n_2$: a number of clockwise rotation of ring gear(440)

As shown in FIG. 2 and FIG. 4, when a variable speed r.p.m. Δn input with $R_0 \leq Z_0$, from the main gear system 100 is applied to the input sun gear 210 positioned in the center of the actuator 200 through the input axle shaft 100', the input sun gear 210 rotates in a geared relationship with the three planet gear members 220 and the ring gear 240 of the actuator 200.

If with a gust of wind, an over speed variable r.p.m. is applied to the said gear system 400, and the output sun gear 410 rotates with a higher speed than the pre-set r.p.m., the output speed monitoring sensor 310 attached to the output axle shaft 500 activates to send a $R_0 \leq Z_0$ signal to the microprocessor 320 as shown in FIG. 2, FIG. 3, FIG. 4 and FIG. 5. The microprocessor 320 compares the signal $R_0 \leq Z_0$ with the pre-set r.p.m. sends a control signal to the mechatronic variable-speed actuating motor 330, and then the actuating motor 330 will accelerate the rotation speed to control counter-clockwise rotation of the ring gear 240 so as to adjust counter-clockwise rotation to the

speed of the spider 230 (the load reaction rotation force is applied to the spider 230 counter-clockwise).

The rotation force of the spider 230 is transmitted via reversal transfer gears 600 and is applied to the ring gear 440 which rotates at the neutral position in the clockwise direction of the variable r.p.m. converting system 400, which is consistent with the equation ②. Consequently, both one-way rotation direction of the pivotally forward-reverse rotatable ring gear 440 and the spider 430 connected to the input axle shaft 100' can be adjust the r.p.m. to meet the pre-set constant output r.p.m. of the output axle shaft 500.

10 3) The Output r.p.m. is lower than the pre-setting r.p.m. with $R_0 \geq Z_0$.

$$Z_0 = \left(\frac{1+ZR}{Z_s} \cdot \Delta n_1 \right) + \left(\frac{ZR}{Z_s} \cdot \Delta n_2 \right) \dots\dots\dots ③$$

+ Δn_2 : the number of counter-clockwise rotation of ring gear 440

As shown in FIG. 2 and FIG. 4, when a variable lower speed r.p.m. Δn input with $R_0 \geq Z_0$, from the main gear system 100 is applied to the input sun gear 210 positioned in the center of the actuator 200 through the input axle shaft 100' and the input sun gear 210, these gears rotate in a geared relationship with three planet gear members 220 and the ring gear 240 of the actuator 200. The lower speed r.p.m. due to weak wind conditions, is also taken into account in the above mentioned gear system 400. The output sun gear 410 rotates with a lower speed r.p.m. than the pre-set r.p.m., thereby the activating output speed monitoring sensor 310 to send a $R_0 \geq Z_0$ signal to the microprocessor 320, as shown in FIG. 2, FIG. 3 and FIG. 4. The microprocessor 320 compares the signal $R_0 \geq Z_0$ with the pre-set r.p.m. and processed to send a control signal to the actuating motor 330. The actuating motor 330 controls the revolving speed of the spider 230 through the ring gear 240 of the planet gear

member 220 in order to rotate in a clockwise at the immovable neutral position.

As above described the rotation force is transmitted via the reversal transfer gears 600 and is applied to the ring gear 440 which rotated at the
5 immovable neutral position in the counter-clockwise direction. Thus, the constant r.p.m. of the output axle shaft 500 can be controlled by the rotation speed and direction of the ring gear 440, which is consistent with the equation (3).

As described previously, the variable r.p.m. converting system of the present invention is applicable to the various industrial fields.

10 Numerous modifications and variations of the present invention are possible : a series or parallel connection of multiple control gear devices and motors, either the input or the output r.p.m. monitoring sensor devices or both of them, and the mechanical structures of the actuator as well as the mechatronic control devices. All such modifications as would be obvious to
15 one skilled in the art are to be included within the scope of this invention as defined by the following claims.

What is claimed is:

1. A variable r.p.m. converting planetary gear system comprising:
 - a) A variable-speed r.p.m. input axle shaft 100',
 - b) An actuator 200 including an input sun gear 210 fixed to the
5 surface of said input axle shaft 100', a plurality of planet gear members 220, a forward-reverse variable speed rotatable spider 230 and a forward-reverse rotatable ring gear 240,
 - c) A mechatronic control means 300 connected to said forward-reverse ring gear 240 to control the rotation speed and the
10 direction of said forward-reverse ring gear 240,
 - d) A constant r.p.m. of planetary gear means 400 including an output spider 430 fixed to the lower part of said input axle shaft 100', rotatable planet members 420 connected to said
15 input spider 230 and a ring gear 440 in geared relationship with said and to rotate in geared relationship with said rotatable planet members 420,
 - e) An output axle shaft 500 fixed in the center of said output sun gear 410.
- 20 2. The variable r.p.m. converting planetary gear system according to claim 1 wherein said forward-reverse spider 230 and said ring gear 440 are equipped with gear's teeth 231, 441 in geared relationship with each other, through transfer gears 600 pivotally fastened to the case 10.
- 25 3. The variable r.p.m. converting planetary gear system according to claim 1 or 2 wherein said mechatronic control means 300 comprises a

sensor 310 monitoring the rotation r.p.m. the output axle shaft 500, a microprocessor 320 to process the rotation speed and direction of said mechatronic control means 300, a forward-reverse variable-speed actuator motor 330 which is rotating in the speed and direction being
5 controlled by said microprocessor 320, a forward-reverse rotatable worm gear 340 and a worm-wheel-gear 350 formed on the outer surface of said ring gear 240.

4. The variable r.p.m. converting planetary gear system according to claim 3 wherein a control gear 332 is fixed to the rotor shaft 331 of
10 said actuating motor 330 connected to the actuating gear 333 in geared relationship, and said rotatable worm-gear 340 is fixed to the axle shaft 334 and in geared relationship with the worm-wheel-gear 350.

1 / 4

FIG. 1

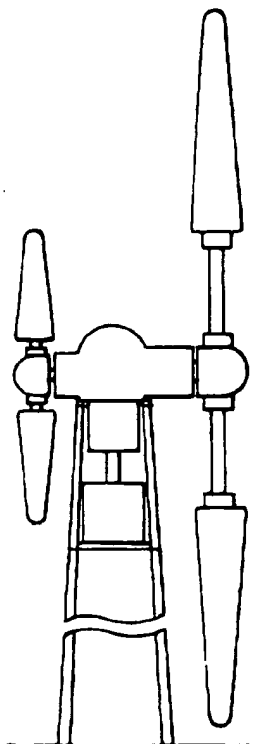


FIG. 2



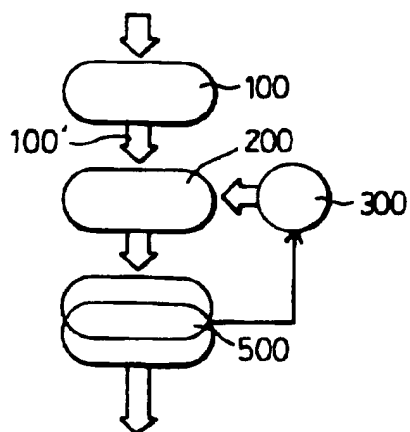


FIG. 3

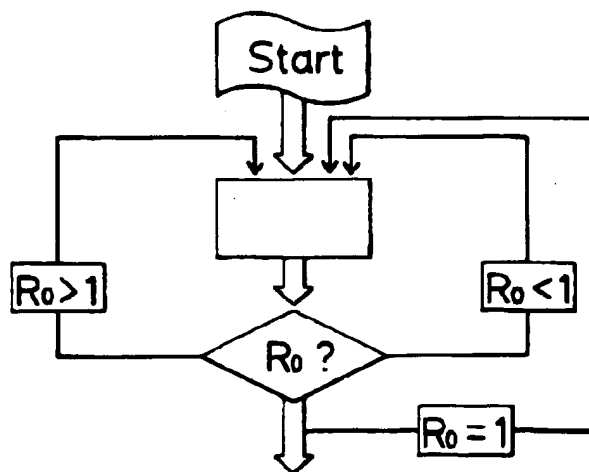

214

FIG. 4

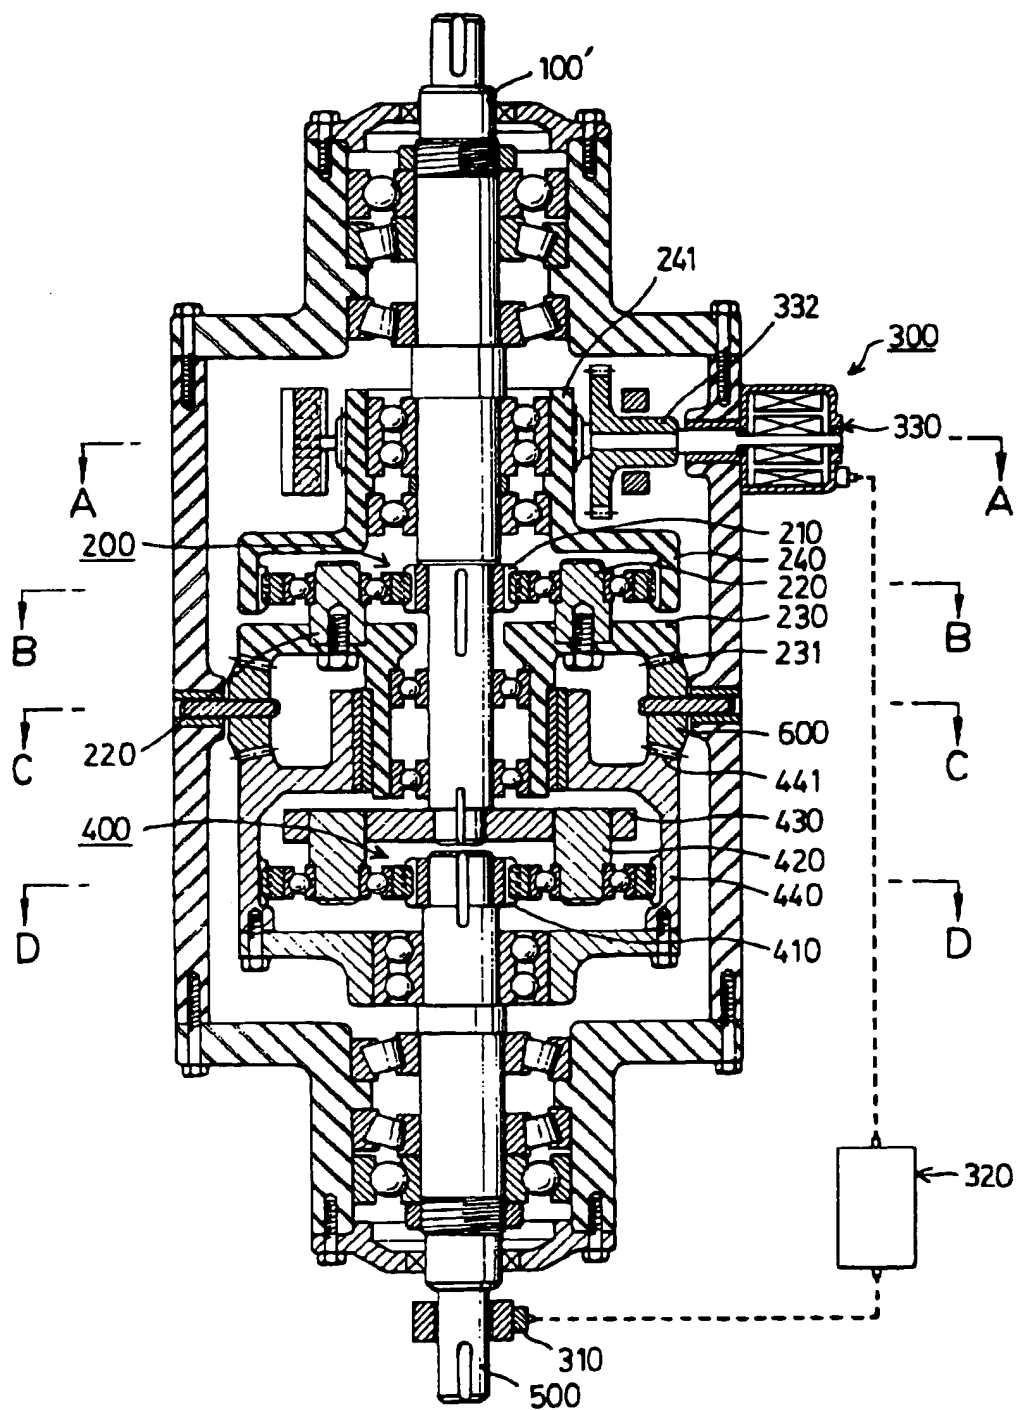

3 / 4

FIG. 5



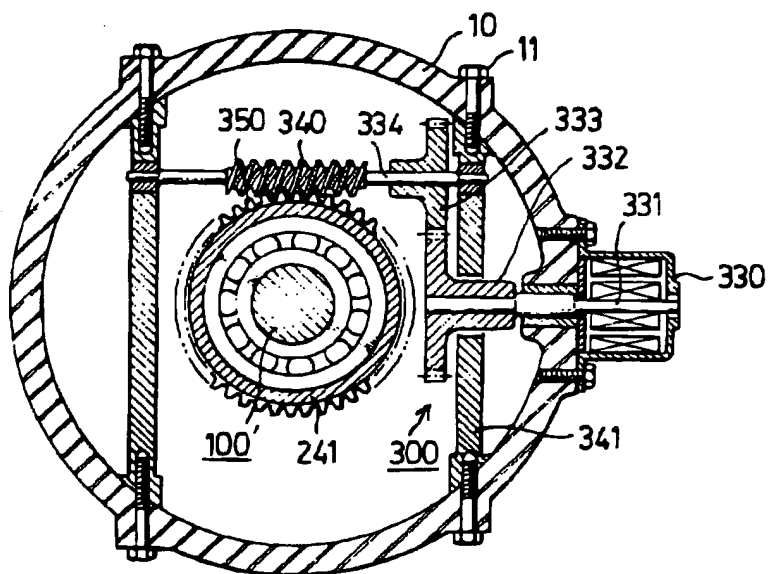


FIG. 6

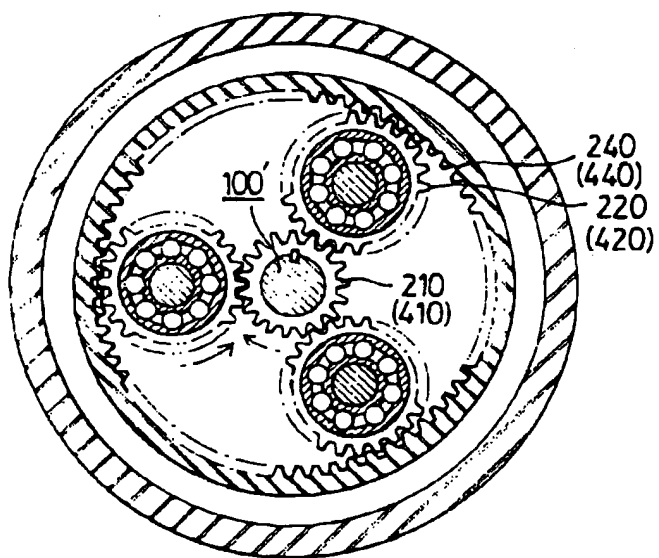

4 / 4

FIG. 7

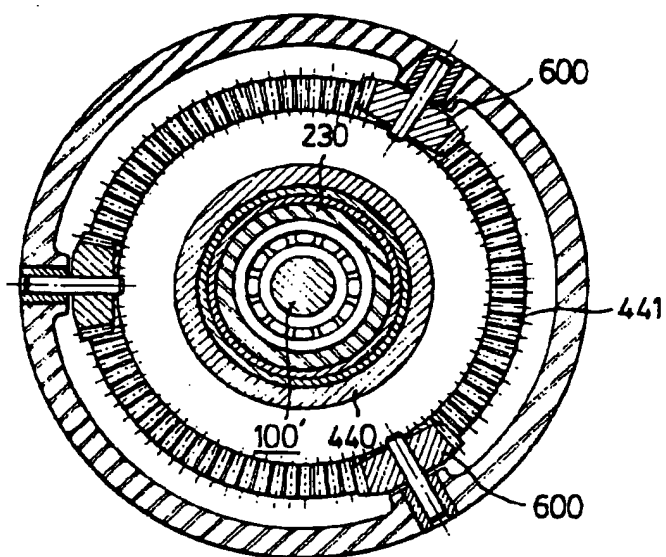

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 96/00042

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁶: F 16 H 3/72, 1/46, 37/08; F 03 D 11/02; H 02 P 9/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁶: F 16 H 1/46, 3/72, 37/06, 37/08; F 03 D 1/00, 1/02, 7/02, 11/00; H 02 P 9/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, PAJ, IFIPAT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 635 639 A1 (ASHOT) 25 January 1995 (25.01.95), totality.	1-4
A	JP 6-200 864 A (KAWATETSU) 19 July 1994 (19.07.94), totality.	1-4
A	EP 0 120 654 A1 (ENGLISH ELECTRIC COMPANY) 03 October 1984 (03.10.84), totality.	1-4
A	FR 2 509 822 A1 (SCHWEIZERISCHE LOKOMOTIV- u. MASCHINENFABRIK) 21 January 1983 (21.01.83), totality; especially claims.	1-4
A	WO 81/01 444 A1 (ALLMÄNNA) 28 May 1981 (28.05.81), totality.	1-4
A	WO 91/19 916 A1 (HICKS) 26 December 1991 (26.12.91), totality.	1-4
A	US 4 513 206 A (GERVASIO) 23 April 1985 (23.04.85), totality.	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 May 1996 (22.05.96)

Date of mailing of the international search report

07 June 1996 (07.06.96)

Name and mailing address of the ISA/AT
AUSTRIAN PATENT OFFICE
Kohlmarkt 8-10
A-1014 Vienna
Facsimile No. 1/53424/535

Authorized officer

Werdecker

Telephone No. 1/53424/361

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR 96/00042

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication		Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets		Datum der Veröffentlichung Publication date Date de publication	
EP A1	635639	25-01-95		IL A0	106440	15-11-93	
JP	6200864			keine - none - rien			
EP A1	120654	03-10-84		DE C0	3471978	14-07-88	
				DK A0	1621784	19-03-84	
				DK A	1621784	24-09-84	
				EP B1	120654	08-06-88	
				GB A0	8308780	11-08-88	
				GB A0	8406642	18-04-84	
				GB A1	2136883	26-09-84	
				GB B2	2136883	10-02-88	
				IN A	1608889	15-08-87	
				GB A0	8308018	27-04-83	
FR A1	2509822	21-01-83		AT A	2197782	15-01-84	
				AT B	3756099	27-08-84	
				CH A	6552976	01-10-84	
				DE A1	3129793	04-02-84	
				DE C2	3129793	19-12-83	
				FR B1	3509822	08-04-86	
				IT A0	8222169	02-07-83	
				IT A2	1153109	14-01-87	
				JP A2	5804385	14-04-84	
				JP B4	1010385	21-03-89	
				US A	4519272	28-03-83	
WO A1	8101444	28-05-81		CA A1	1144077	03-04-83	
				DK A	2959781	03-07-81	
				EP A1	39710	18-11-81	
				SE A	7909379	18-03-81	
				SE B	419113	15-07-81	
				SE C	419113	22-10-81	
WO A1	9119916	26-12-91		GB A0	9012925	01-08-90	
US A	4513206	23-04-85		BE A1	890343	15-03-89	
				CA A1	1180757	08-01-89	
				CH A	648907	15-04-88	
				DE A1	3136576	01-04-84	
				DE A	4048781	16-09-81	
				FI A	812867	16-09-81	
				FR A1	3490287	19-09-87	
				FR B1	3490287	18-11-87	
				GB A1	9083870	01-09-90	
				GB B2	2083870	02-09-90	
				GR A	74673	02-07-84	
				IE A	51905	25-04-87	
				IT A0	8024660	15-09-80	
				IT A	1209350	16-07-86	
				LU A	833611	14-04-83	
				NL A	8104192	01-04-81	
				NO A	813094	16-03-81	
				SE A	6105469	16-03-82	